


除湿干燥系列

输送式除湿干燥机工作原理 & 规格表 Working Principle & Specification of 3 IN 1

■ 系统流程示意图 System Flow Chart

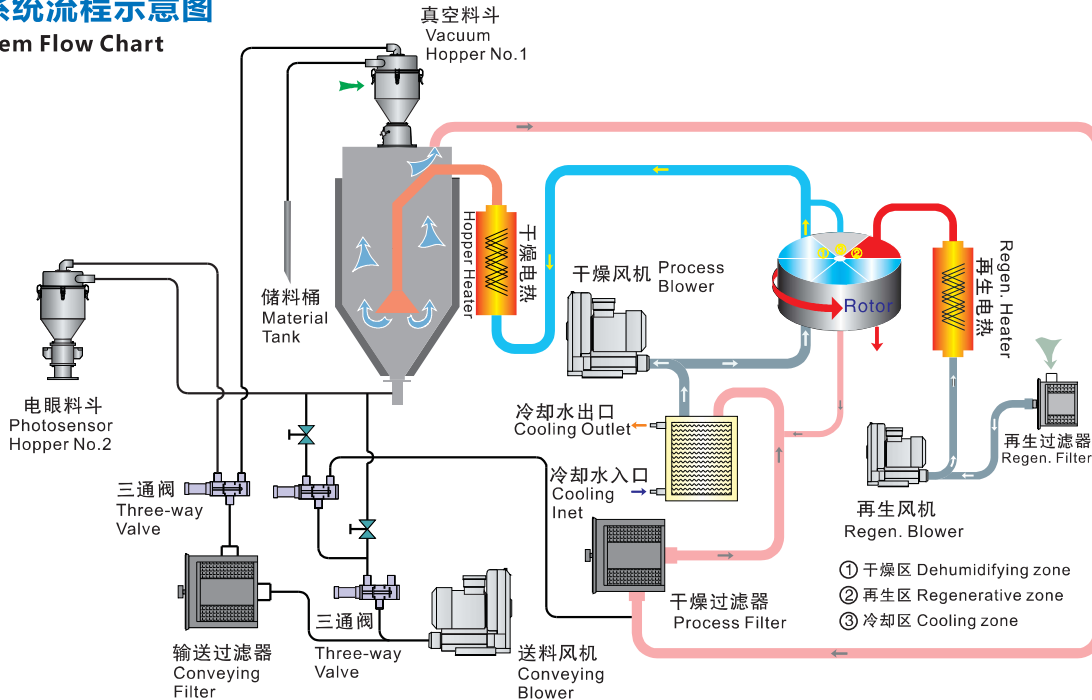

■ 机型规格 Specifications

型号 Model	SCD-	25/60	50/60	50/90	75/90	100/90	100/120	150/120	150/150	200/150	200/200	300/200	400/300	500/400	600/500
干燥系统 Drying System															
保温桶容量 (kg) Hopper Capacity		25	50	50	75	100	100	150	150	200	200	300	400	500	600
干燥电热功率 (kw) Drying Heater		2.4	2.4	4	4	4	7.2	7.2	9	9	12	15	15	18	18
干燥风机功率 (kw) Drying Blower Power		0.4	0.4	0.75	0.75	0.75	1.1	1.1	1.5	1.5	2.2	2.2	4	5.5	7.5
除湿系统 Dehumidifying System															
除湿风量 (m ³ /hr) Dehumidifying Air Quantity		60	60	90	90	90	120	120	150	150	200	200	300	400	500
再生电热功率 (kw) Reg. Heater Power		2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	4	4	4	7.2	7.2
再生风机功率 (kw) Reg. Blower Power		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.4	0.4	0.4	0.75	0.75
送料系统 Feeding System															
送料风机功率 (kw) Feeding Blower		1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.5	1.5	1.5	1.5	2.2	2.2
吸料机配管 (inch) Dia. Of Material Pipe		1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
真空料斗 (L) Vacuum Hopper No.1		6	6	6	6	6	6	6	6	12	12	12	12	20	20
电眼料斗 (L) Photosensor Hopper No.2		3	3	3	6	6	6	6	6	12	12	12	12	24	24
外型 Dimension															
高度 H (mm)		1530	1550	1650	1830	1830	1870	1870	1910	2180	2180	2300	2300	2700	2800
宽度 W (mm)		1050	1050	1050	1100	1250	1180	1290	1340	1490	1490	1500	1550	1750	1760
深度 D (mm)		850	850	850	870	970	960	960	1080	1100	1100	1100	1180	1320	1320
重量 (kg) Weight		250	280	300	320	385	442	449	475	530	560	615	635	760	850

- 注: 1) 选购露点检测装置, 机型后加注 "D";
2) 选购PLC控制搭配LCD触控式人机界面, 机型后面加注 "P";
3) 机器电压规格为: 3Φ, 380VAC, 50Hz.

- Note: 1) For models that are equipped with dew-point testing device, add "D" at model behind.
2) Adopts PLC control plus LCD touch screen, add "P" at model behind.
3) Power: 3Φ, 380VAC, 50Hz.